




## VL36

- *36 wide x 30mm high*
- *Remote driver*
- *Surface (suspended optional)*
- *Integral tensioning joiner*
- *Standard Colour White (other colours optional)*
- *5 watts/m, 14 watts/m or 28 watts/m*
- *Solid PCB (removable and replaceable)*
- *Mitred bends available (90 and 135 degree standard)*
- *3K, 4k CRI80+ (CRI95+ optional)*
- *Reported L70 B10 (10K) > 60,000 hrs*
- *Forecasted L70 83,000 hrs*
- *Ledvision PMMA high impact diffuser*
- *Integral mounting guides provided*
- *RGBW optional*
- *Manufactured in module lengths up to 4m*
- *Rear or End feed entry*
- *All photometric data provided in absolute lumens*
- *Manufactured in South Australia*
- *Adjustable mounting brackets optional*



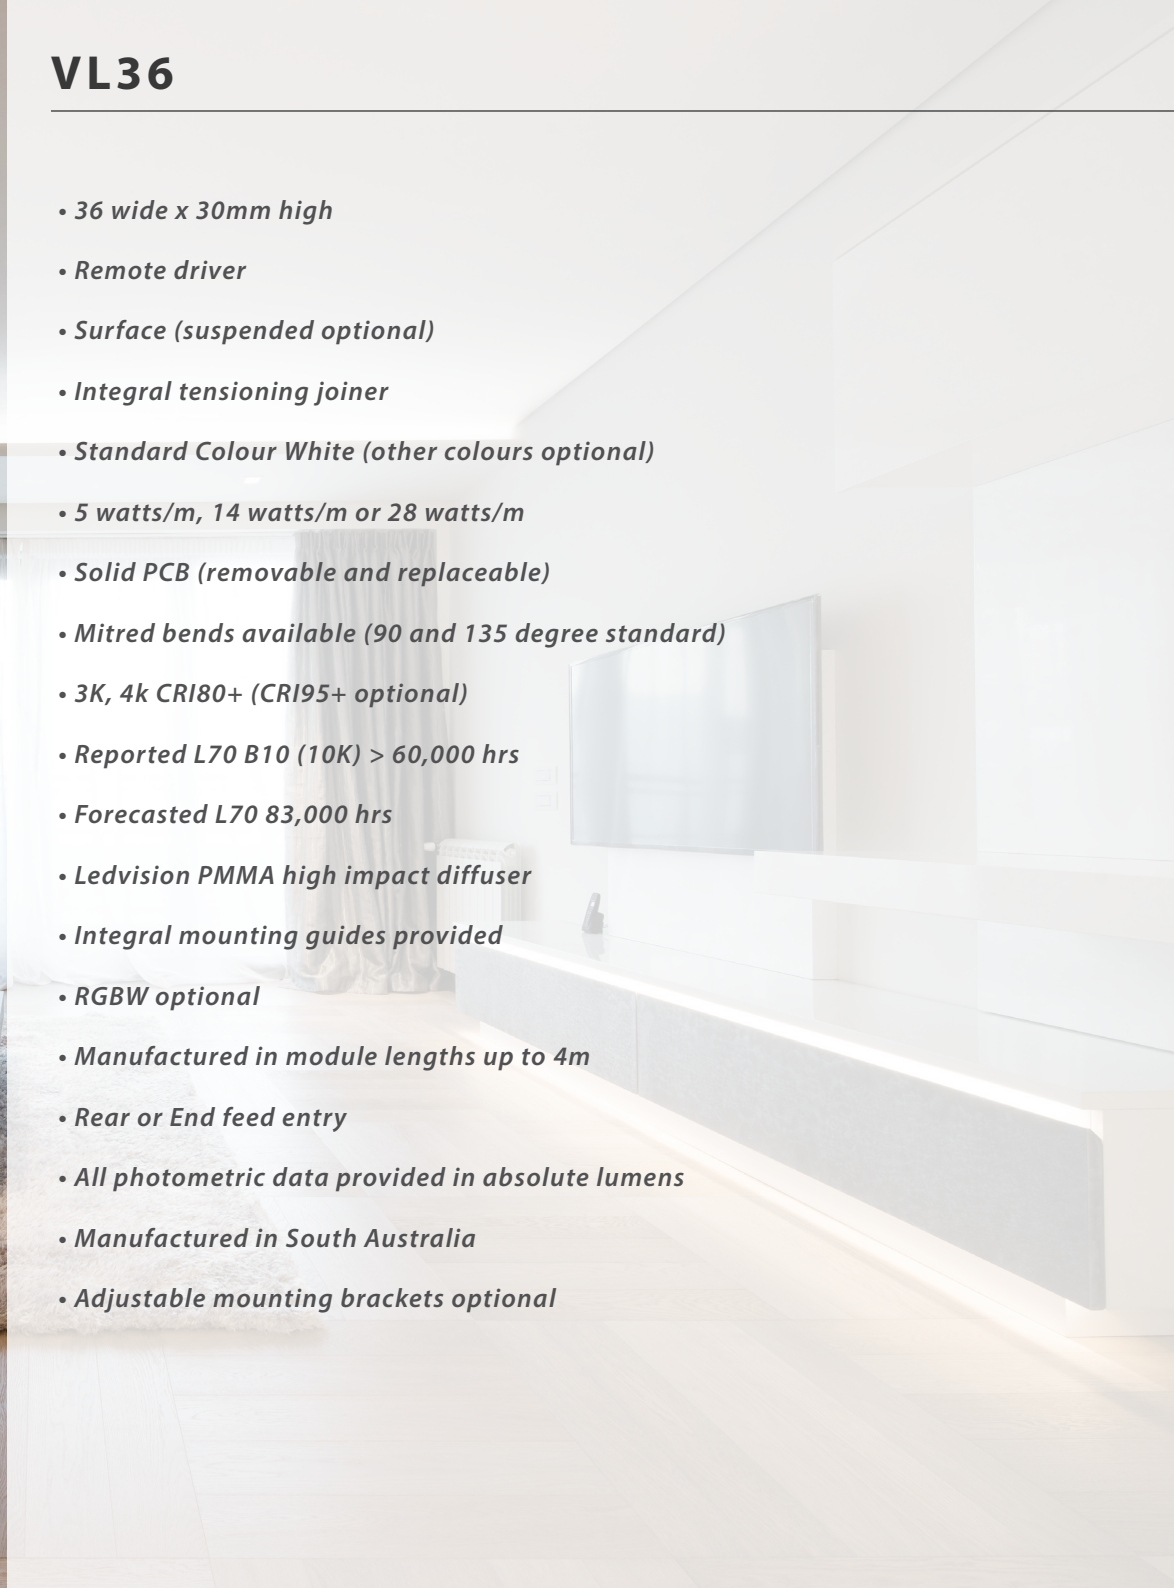

## VL36

	VOLTAGE	WATTAGE
<b>VL36-5</b>	DC24V	5W/m
<b>VL36-14</b>	DC24V	14W/m
<b>VL36-28</b>	DC24V	28W/m
<b>VL36-RGBW*</b>	DC24V	28.8W/m

\* Flexible Strip Used

### VL36 - SURFACE MOUNT (36w x 30h)

VL36 - 3000/4000K (5w per metre)



VL36 - 3000/4000K (14w per metre)



VL36 - 3000/4000K (28w per metre)




VL36 - Dual RGBW (28.8w per metre)



### VL36 PROFILE:

36mm wide x 30mm high



#### INCLUSIONS :

Concealed Mounting Guides  
Solid PCB (5, 14 & 28W, 3K, 4K)  
Tensioning joiner

#### DIFFUSER :

Ledvision PMMA  
high impact

#### OPTIONS \*on request :

Black (reduced efficiency). Custom  
Adjustable Brackets