


ZNT RANGE

WATERTIGHT POLYCARBONATE CEILING-MOUNTING LUMINAIRES

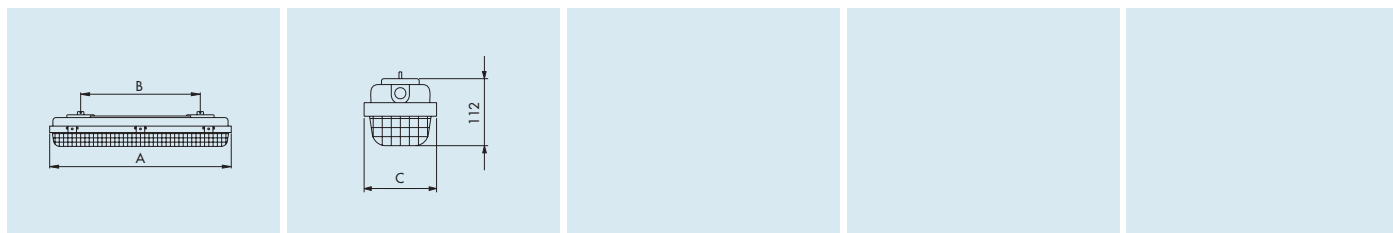

DIFFUSED REFLECTOR

WIRED VERSIONS WITH P.F. CORRECTION- IP65 - CLASS I



GW80004



Code	No. lamps	Lamp power	Lamp type	Lamp holder	Dimension AxBxC (mm)	Weight (Kg)	Pack Carton
VOLTAGE: 230 V - 50 Hz							
GW 80 001	1	18 W	FD	G13	680x112x135	1.9	1/28
GW 80 002	1	36 W	FD	G13	1290x112x135	3.1	1/28
GW 80 003	1	58 W	FD	G13	1590x112x135	4.1	1/28
GW 80 004	2	18 W	FD	G13	680x112x195	2.4	1/20
GW 80 005	2	36 W	FD	G13	1290x112x195	4.8	1/20
GW 80 006	2	58 W	FD	G13	1590x112x195	6.6	1/20
VOLTAGE: 240 V - 50 Hz							
GW 80 071	1	18 W	FD	G13	680x112x135	1.9	1/28
GW 80 072	1	36 W	FD	G13	1290x112x135	3.1	1/28
GW 80 073	1	58 W	FD	G13	1590x112x135	4.1	1/28
GW 80 074	2	18 W	FD	G13	680x112x195	2.4	1/20
GW 80 075	2	36 W	FD	G13	1290x112x195	4.8	1/20
GW 80 076	2	58 W	FD	G13	1590x112x195	6.6	1/20
VOLTAGE: 220 V - 60 Hz							
GW 80 041	1	18 W	FD	G13	680x112x135	1.9	1/28
GW 80 042	1	36 W	FD	G13	1290x112x135	3.1	1/28
GW 80 043	1	58 W	FD	G13	1590x112x135	4.1	1/28
GW 80 044	2	18 W	FD	G13	680x112x195	2.4	1/20
GW 80 045	2	36 W	FD	G13	1290x112x195	4.8	1/20
GW 80 046	2	58 W	FD	G13	1590x112x195	6.6	1/20

NON-WIRED VERSIONS



GW80104




Code	No. lamps	Lamp power	Lamp type	Lamp holder	Dimension AxBxC (mm)	Weight (Kg)	Pack Carton
GW 80 101	1	18 W	FD	G13	680x112x135	1	1/28
GW 80 102	1	36 W	FD	G13	1290x112x135	2	1/28
GW 80 103	1	58 W	FD	G13	1590x112x135	3.1	1/28
GW 80 104	2	18 W	FD	G13	680x112x195	1.8	1/20
GW 80 105	2	36 W	FD	G13	1290x112x195	3.2	1/20
GW 80 106	2	58 W	FD	G13	1590x112x195	4.2	1/20

ACCESSORIES SUPPLIED: structural components: reflector, accessory-holding plate. Electrical components: lampholder with cables, supply terminal. Devices are supplied with standard service items.

DIFFUSED REFLECTOR - ELECTRONIC BALLAST

WIRED VERSIONS WITH P.F. CORRECTION- IP65 - CLASS I



GW80142




Code	No. lamps	Lamp power	Lamp type	Lamp holder	Dimension AxBxC (mm)	Weight (Kg)	Pack Carton
VOLTAGE: 220 / 240 V - 50 / 60 Hz							
GW 80 141	1	18 W	FD	G13	680x112x135	1.7	1/28
GW 80 142	1	36 W	FD	G13	1290x112x135	2.8	1/28
GW 80 143	1	58 W	FD	G13	1590x112x135	3.5	1/28
GW 80 144	2	18 W	FD	G13	680x112x195	2.4	1/20
GW 80 145	2	36 W	FD	G13	1290x112x195	3.8	1/20
GW 80 146	2	58 W	FD	G13	1590x112x195	4.9	1/20

ZNT RANGE

WATERTIGHT POLYCARBONATE CEILING-MOUNTING LUMINAIRES



WIRED VERSIONS WITH P.F. CORRECTION- IP65 - CLASS I




GW80191



Code	No. lamps	Lamp power	Lamp type	Lamp holder	Dimension AxBxC (mm)	Weight (Kg)	Pack Carton
VOLTAGE: 220 / 240 V - 50 / 60 Hz							
GW 80 191	1	55 W	FSD	2G11	680x112x135	1.6	1/28
GW 80 192	2	55 W	FSD	2G11	680x112x195	1.9	1/20
GW 80 193	2	55 W	FSD	2G11	1290x112x135	2.6	1/28
GW 80 194	2	80 W	FSD	2G11	1290x112x135	3	1/28
GW 80 195	4	55 W	FSD	2G11	1290x112x195	3.2	1/20

ATEX VERSION ZONE 2 (G)

WIRED VERSIONS WITH P.F. CORRECTION- IP65 - CLASS I



ZNT RANGE

GW80454



Code	No. lamps	Lamp power	Lamp type	Lamp holder	Dimension AxBxC (mm)	Weight (Kg)	Pack Carton
VOLTAGE: 230 V - 50 Hz							
GW 80 454	2	18 W	FD	G13	680x112x195	2.4	1/20
GW 80 455	2	36 W	FD	G13	1290x112x195	4.8	1/20
GW 80 456	2	58 W	FD	G13	1590x112x195	6.6	1/20

DIFFUSED REFLECTOR - AD-FT

WIRED VERSIONS WITH P.F. CORRECTION- IP65 - CLASS I



GW80154



Code	No. lamps	Lamp power	Lamp type	Lamp holder	Dimension AxBxC (mm)	Weight (Kg)	Pack Carton
VOLTAGE: 230 V - 50 Hz							
GW 80 151	1	18 W	FD	G13	680x112x135	1.9	1/28
GW 80 152	1	36 W	FD	G13	1290x112x135	3.1	1/28
GW 80 153	1	58 W	FD	G13	1590x112x135	4.1	1/28
GW 80 154	2	18 W	FD	G13	680x112x195	2.4	1/20
GW 80 155	2	36 W	FD	G13	1290x112x195	4.8	1/20
GW 80 156	2	58 W	FD	G13	1590x112x195	6.6	1/20

CHARACTERISTICS: low loss reactors. Fast blowing fuse. Deos starter, cables 1 mm² PVC HT105° C.

DIFFUSED REFLECTOR - CLASS II

WIRED VERSIONS WITH P.F. CORRECTION- IP65 - CLASS II



GW80162



Code	No. lamps	Lamp power	Lamp type	Lamp holder	Dimension AxBxC (mm)	Weight (Kg)	Pack Carton
VOLTAGE: 230 V - 50 Hz							
GW 80 161	1	18 W	FD	G13	680x112x135	2.3	1/28
GW 80 162	1	36 W	FD	G13	1290x112x135	3.5	1/28
GW 80 163	1	58 W	FD	G13	1590x112x135	4.8	1/28
GW 80 164	2	18 W	FD	G13	680x112x195	2.8	1/20
GW 80 165	2	36 W	FD	G13	1290x112x195	5.4	1/20
GW 80 166	2	58 W	FD	G13	1590x112x195	7.5	1/20

CHARACTERISTICS: reinforced insulation cables. No earthing devices.

NEW

ZNT RANGE

WATERTIGHT POLYCARBONATE CEILING-MOUNTING LUMINAIRES



COMPLEMENTARY ITEMS




RESTRICTED BEAM REFLECTORS

Code	No. lamps	Lamp power	Dimension AxBxC (mm)	Weight (Kg)	Pack Carton
MATERIAL: 99.85% ALUMINIUM POLISHED AND OXIDIZED					
GW 80 542	1	36 W	1290x112x135	0.7	30
GW 80 543	1	58 W	1590x112x135	1	30
GW 80 545	2	36 W	1290x112x195	1.1	30
GW 80 547	2	55 W	1590x112x195		1/30
GW 80 546	2	58 W	1290x112x135	1.5	30
GW 80 548	4	55 W	1290x112x195		1/30

CHARACTERISTICS: direct fixing on prismatic controller without equipment auxiliary.

WALL AND CEILING WEATHERPROOF EMERGENCY LUMINAIRES

ZNT - NM - IP65 - CLASS I




GW80364



Code	No. lamps	Lamp power	Lamp type	Battery type	Duration	Light flux in emerg.	Weight (Kg)	Pack Carton
VOLTAGE: 230 V - 50 Hz								
GW 80 361	1	18 W	FD	Ni-Cd	1 h	340	2.9	1
GW 80 362	1	18 W	FD	Ni-Cd	3 h	430	3.3	1
GW 80 364	1	36 W	FD	Ni-Cd	3 h	550	4.8	1
GW 80 366	1	58 W	FD	Ni-Cd	3 h	850	5.7	1

ZNT - M - IP65 - CLASS I




GW80371



Code	No. lamps	Lamp power	Lamp type	Battery type	Duration	Light flux in emerg.	Weight (Kg)	Pack Carton
VOLTAGE: 230 V - 50 Hz								
GW 80 372	1	36 W	FD	Ni-Cd	1 h	410		1
GW 80 374	1	58 W	FD	Ni-Cd	1 h	630		1
GW 80 371	2	18 W	FD	Ni-Cd	1 h	340	3.5	1
GW 80 373	2	36 W	FD	Ni-Cd	1 h	410	5.9	1
GW 80 375	2	58 W	FD	Ni-Cd	1 h	630	7.6	1

CHARACTERISTICS: one lamp only functions in case of emergency.

ZNT - M - IP65 - CLASS I - ELECTRONIC POWER SUPPLY



Code	No. lamps	Lamp power	Lamp type	Dimension AxBxC (mm)	Duration	Light flux in emerg.	Weight (Kg)	Pack Carton
VOLTAGE: 220 / 240 V - 50 / 60 Hz								
GW 80 198	2	55 W	FSD	1290X800X135	1 h	400		1/28

NEW