


## VL26

- 26mm wide x 11mm high
- Remote Driver
- Standard finish Anodised Aluminium (other colours optional)
- 7 watts/m or 14 watts/m
- Solid PCB
- 3K, 4k CRI80+ (CRI95+ optional)
- Reported L70 B10 (10K) > 60,000 hrs
- Forecasted L70 83,000 hrs
- Ledvision PMMA high impact diffuser
- Pre-mount clips included
- IP65 optional
- RGBW optional
- Manufactured in module lengths up to 4m
- Rear or End feed entry available
- All photometric data provided in absolute lumens
- Manufactured in South Australia



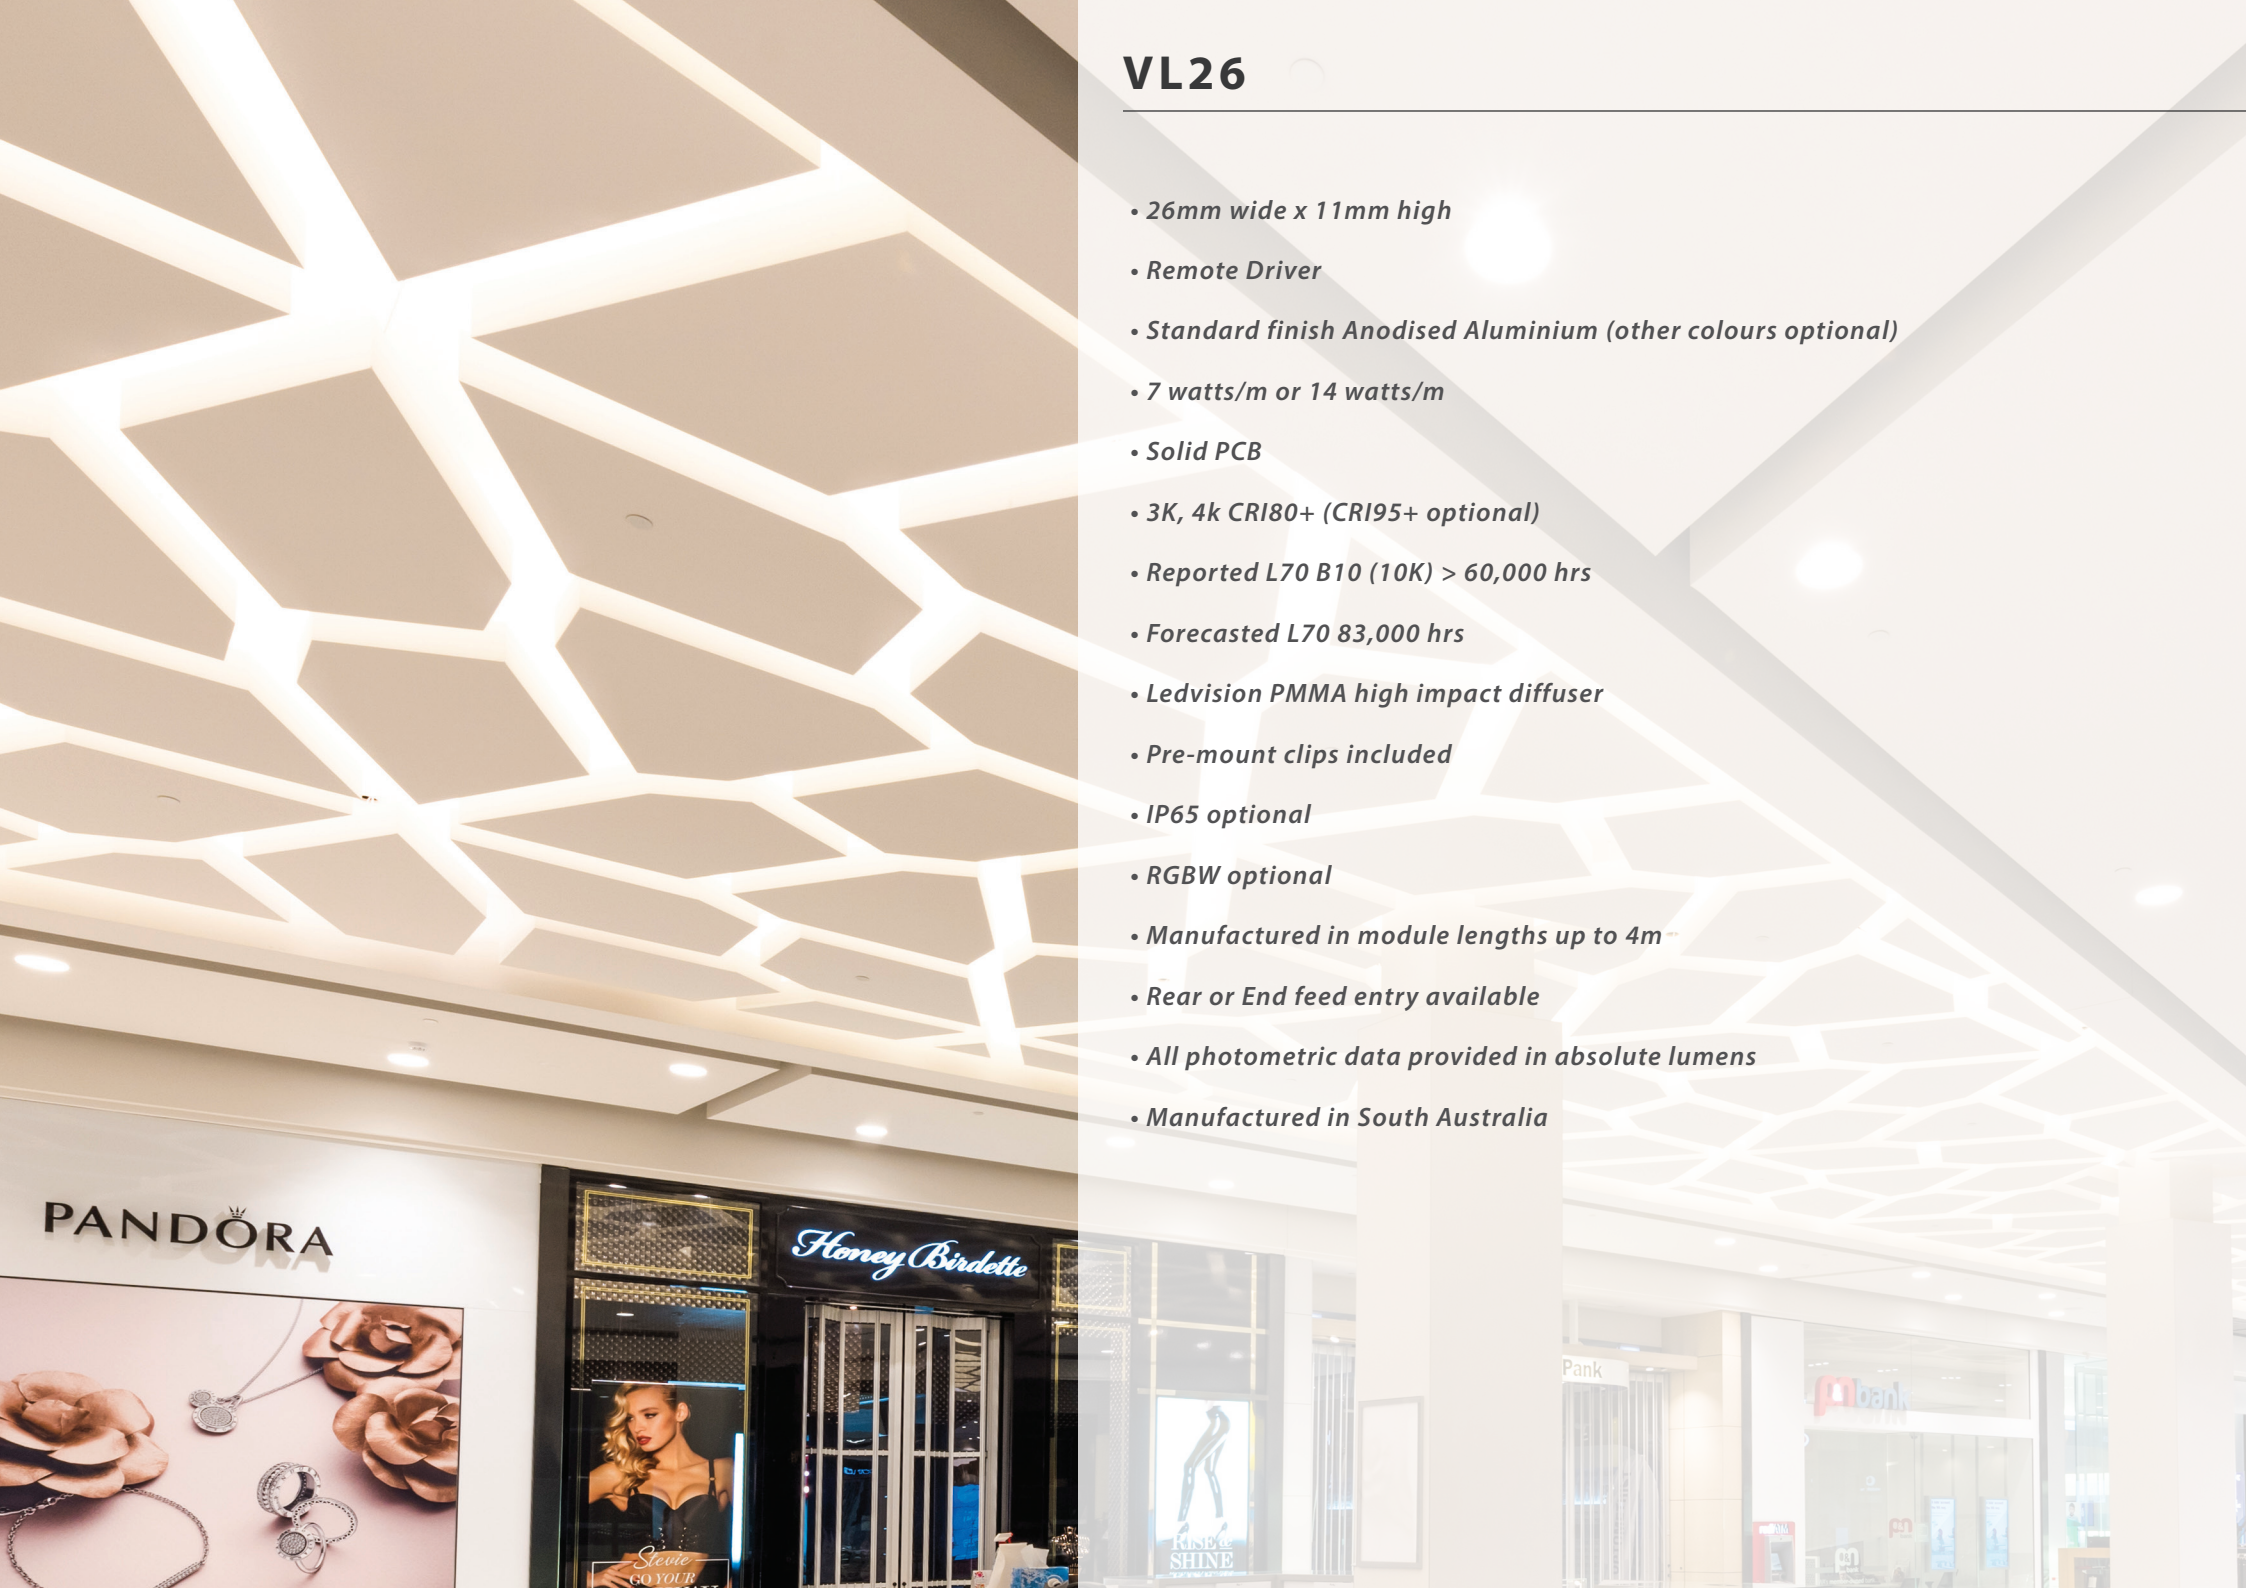

# VL26

	VOLTAGE	WATTAGE
<b>VL26-7</b>	DC24V	7W/m
<b>VL26-14</b>	DC24V	14W/m
<b>VL26-RGB*</b>	DC24V	14.4W/m
<b>VL26-RGBW*</b>	DC24V	14.4W/m

\* Flexible Strip Used

## VL26 - SURFACE MOUNT (26w x 11h)

VL26 - 3000/4000K (7w per metre)



VL26 - 3000/4000K (14w per metre)



VL26 - RGB (14.4w per metre)




VL26 - RGBW (14.4w per metre)



## VL26 PROFILE:

26mm wide x 11mm high



### INCLUSIONS :

Solid PCB (7 & 14W, 3K, 4K)  
Mounting Clips

### DIFFUSER :

Ledvision PMMA  
high impact

### OPTIONS \*on request :

White, Black, Custom